


Delta Pull and Cabinet Handles

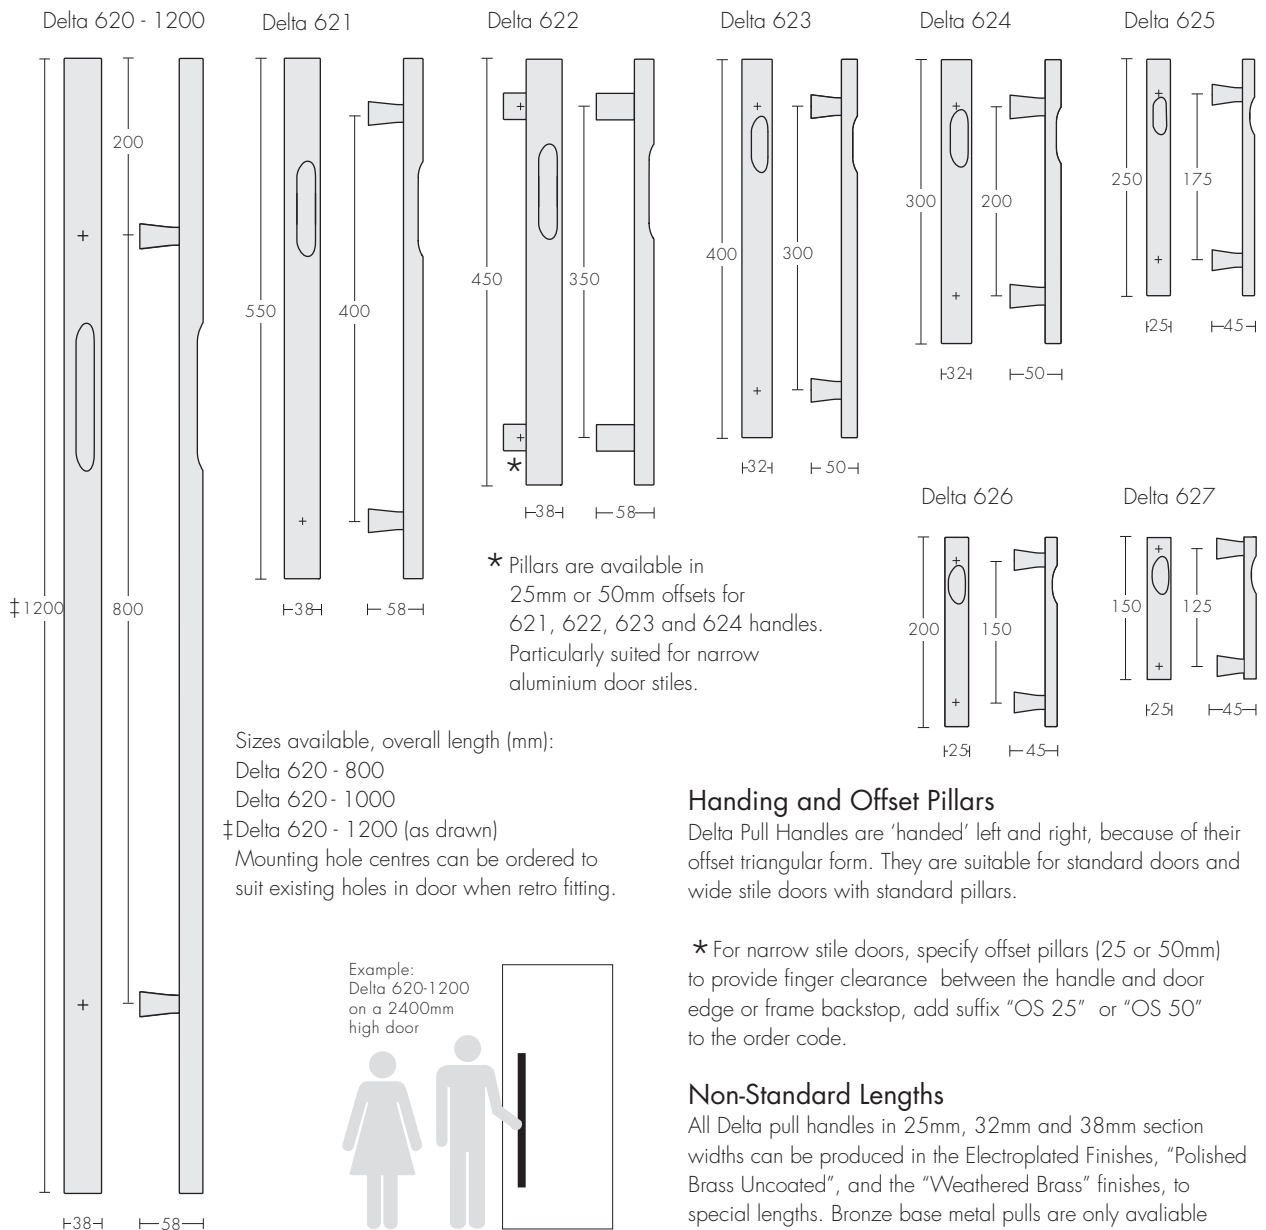

Sizes available, overall length (mm):
 Delta 620 - 800
 Delta 620 - 1000
 ‡ Delta 620 - 1200 (as drawn)
 Mounting hole centres can be ordered to suit existing holes in door when retro fitting.

Handing and Offset Pillars

Delta Pull Handles are 'handed' left and right, because of their offset triangular form. They are suitable for standard doors and wide stile doors with standard pillars.

* For narrow stile doors, specify offset pillars (25 or 50mm) to provide finger clearance between the handle and door edge or frame backstop, add suffix "OS 25" or "OS 50" to the order code.

Non-Standard Lengths

All Delta pull handles in 25mm, 32mm and 38mm section widths can be produced in the Electroplated Finishes, "Polished Brass Uncoated", and the "Weathered Brass" finishes, to special lengths. Bronze base metal pulls are only available in models 621 to 625.

Section width	Maximum length
38mm	1200mm
32mm	800mm
25mm	600mm


- To specify special lengths, state:
- A: Handle section width 25mm, 32mm or 38mm.
 - B: Overall length.
 - C: Mounting pillar centres.
 - D: Distance from the top of the handle to the top of the thumb recess.
 - E: Length of the thumb recess.
(Note: Thumb recess can be deleted).
 - F: Handing: Left hand (LH) or Right hand (RH).

Example of specification:

	A	B	C	D	E	F
Delta	32mm	800mm	600mm	125mm	60mm	LH

Include Mounting option/Finish/Quantity

Delta Lever Handle

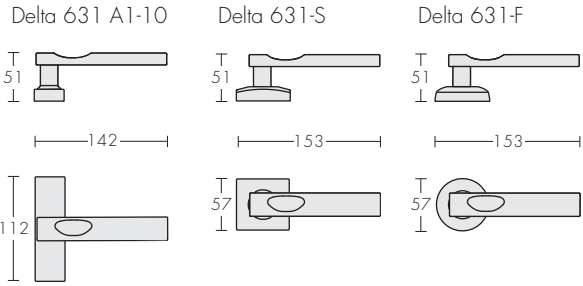

See Technical Section for backplate designs and options.



Delta 631 on S rose



Delta 631 on A1-10 plate



Delta 622 on offset pillars



Delta 623 on standard pillars