

Installation of the flush pulls and turn in an aluminium stile



Retrofit Flush Pulls and Turn (USA)

Designed to fit on aluminium doors as retrofits onto Fleetwood Archetype Locks. These flush pulls have clean simple lines with a generous finger recess length, including a lip on the verticle edges to provide extra finger grip.

The flush pulls fit back to back with semi concealed fixings on the inside flush pull. The outside flush pull has mounting collars that fit into the inside pull at the top and bottom of the finger recess. Fixing is with two M6 socket set screws.

The finger recess measures 35mm (1³/₈") x 115mm (4¹/₂") x 16mm (5/8") deep.


The thumb turn body fastenes to the lockcase. The turn is positioned vertical when the door is unlocked and rotates 120 degrees into the locked position.

All of these components fit into the standard cutout detail for the Fleetwood Flush Pulls.

The style options below can be applied to the flush pulls to suit decor alternatives and to match other Chant Flush Pulls and door hardware on the project.

All finishes options apply, refer to Finishes Section.

Style Options:

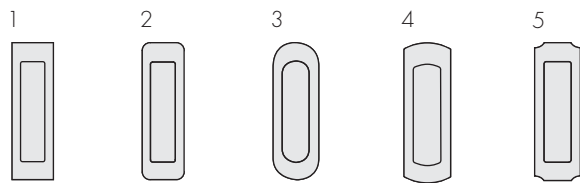

Style Options and Code Numbers

1	2	3	4	5
4781	4782	4783	4784	4785

To cover the machined opening in the aluminium stile, the Style Options 1, 2, 4 and 5 flush pulls are 175mm (6¹¹/₁₆") tall, and Style Option 3 is 200mm (7⁷/₈") tall.

To specify:

Code Number	Finish
4791	SCPV